



**APPOSITE**  
TECHNOLOGIES



## Linktropy® Mini Series WAN Emulators

### Linktropy Mini<sup>2</sup> / Linktropy Mini-G™

Basic WAN emulation capabilities at unbeatable prices.

## SIMULATE

**Bandwidth | Latency & Jitter | Packet Loss**

The Linktropy Mini2 and Mini-G are portable, low cost, easy-to-use WAN emulators, designed to emulate basic network conditions for application development and customer demonstrations of networking products.

The Linktropy Mini Series WAN emulators simulate bandwidth, latency, and loss separately in each direction. Their small size and light weight make them easy to carry, while their fanless design and solid-state storage offers silent operation with high reliability. The Mini2 simulates links up to 100 Mbps while the Mini-G handles links up to 1 Gbps.

An intuitive, browser-based interface makes installation and configuration quick and easy. A real-time traffic monitor displays throughput graphs and statistics, revealing the effects of WAN conditions on application performance. Together, the GUI allows users to grasp the test conditions at a glance and quickly view the results.

## FEATURES

**Easy to Use:** The Linktropy Mini Series emulators are a snap to install and configure. Just plug in the Ethernet cables, specify the link conditions, and begin testing. No software to install, no training needed.

**Bandwidth up to 1 Gbps:** Emulate links up to 1 Gbps in each direction with the Mini-G and 100 Mbps with the Mini2.

**Delay up to 10 seconds:** Emulate latency from 0.1 ms. up to 10 sec. in each direction in a constant, normal, or uniform distribution.

**Error Emulation:** Specify loss as a packet loss rate, bit error rate, or both.

**Emulate any WAN:** Emulate terrestrial, wireless,

internet, satellite or any other type of wide area network.



**Traffic Monitor:** See a visual display of the current traffic, including throughput graphs and link statistics.

**Bridging/Routing:** Install the device as either a bridge or router.

**Portable:** Carry the Linktropy Mini2 or Mini-G with you. Their small size and light weight make them easy to take wherever you travel.

**Everything You Need:** Everything you need to emulate a WAN is included in these compact devices. No additional hardware or software required.

# USER INTERFACE

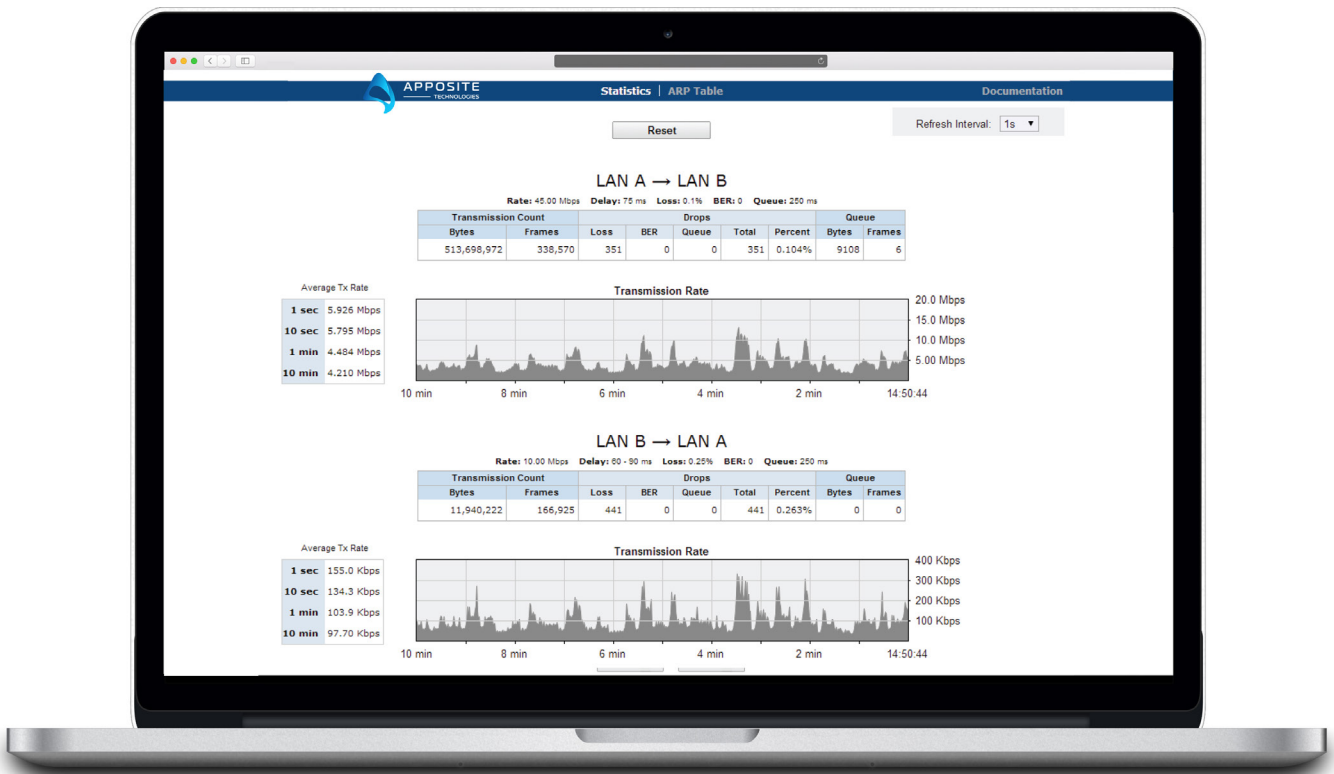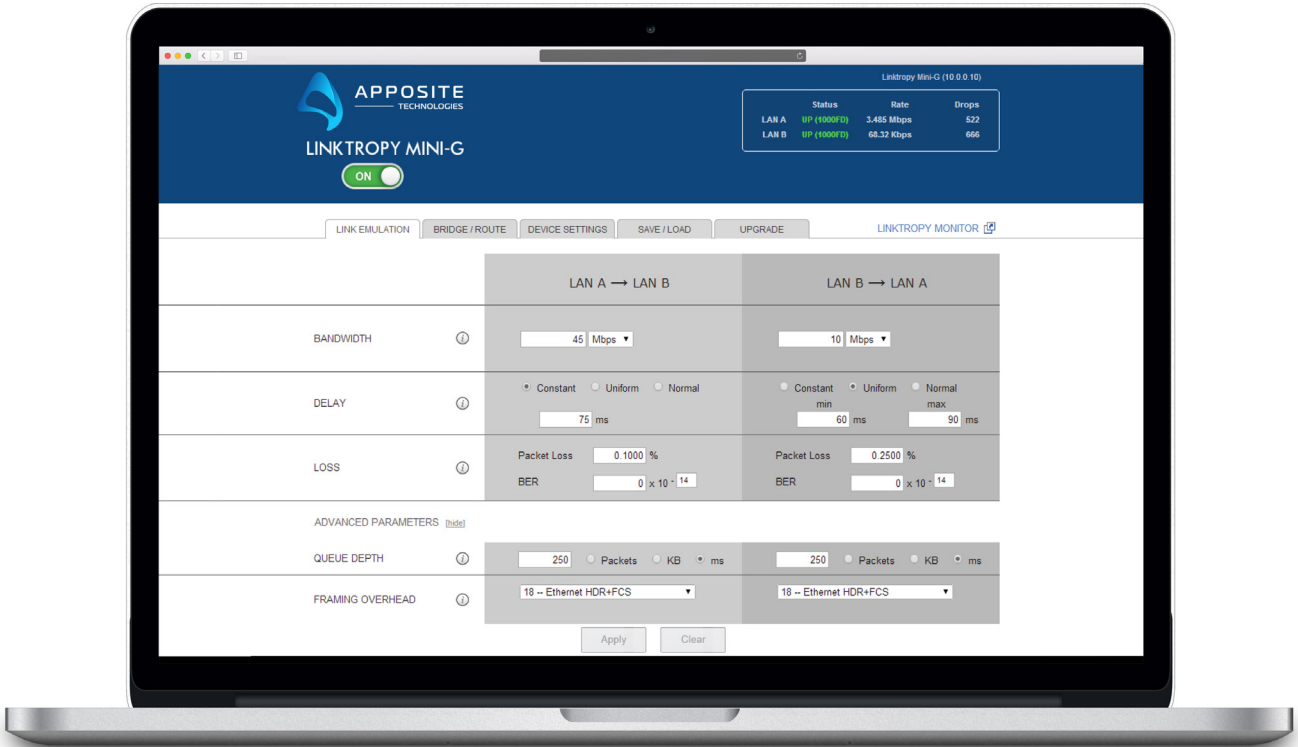

## PRODUCTS

### Linktropy Mini<sup>2</sup> / Linktropy Mini-G™

Basic WAN emulation capabilities at unbeatable prices.



Specifications	Mini <sup>2</sup>	Mini-G
<b>Performance</b>		
Capacity	100 Mbps full duplex, 80,000 packets per second	1 Gbps, 350,000 packets per second
<b>Emulation Settings</b>		
Bandwidth	300 bps – 100 Mbps in 1 bps increments	300 bps – 1 Gbps in 1 bps increments
Delay	0 ms. – 10 sec. in 0.1 ms. increments; constant, uniform, normal distributions	
Packet Loss Rate	0 – 100% in increments of 0.0001%	
Additional Parameters	Bit Error Rate, Queue Depth, Framing Overhead	
<b>Interfaces</b>		
Emulation	2 x 10/100baseT Ethernet	2 x Gigabit Ethernet
Management	1 x 10/100baseT Ethernet, 1 x RS-232 serial console	1 x Gigabit Ethernet, 1 x RS-232 serial console
<b>Physical</b>		
Weight	1.1 lbs (0.5 kg)	
Dimensions	6.6" W x 6.2" D x 1.2" H (168 mm x 157 mm x 30 mm)	
Power Input	7 - 20V DC power, 6 Watts	12V DC power, 11 Watts

### Linktropy Family

For more comprehensive product testing and high-precision benchmarking, Apposite offers the Linktropy 5510 and 8510 models built with the high level of precision, performance, and functionality required by network managers, IT staff, product developers, customer support, and QA teams.



**APPOSITE**  
— TECHNOLOGIES

**17835 Ventura Blvd Suite 211  
ENCINO, CA 91316 USA  
TEL: 1.310.477.9955 | [info@apposite-tech.com](mailto:info@apposite-tech.com)  
[www.apposite-tech.com](http://www.apposite-tech.com)**

Copyright ©2018 Apposite Technologies LLC. All rights reserved.  
Apposite, Linktropy and Netropy are registered trademarks of  
Apposite Technologies.

The Apposite logo and "WAN emulation made easy" are  
trademarks of Apposite Technologies.

P/N: DOC-DSNNE-071